

### CV-801




#### PS/2 DB-15 KVM Benefits

- ▶ PS/2 DB-15 KVM with 8 ports in 1U
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Low cost reliable PS/2 based server management
- ▶ No software or drivers required
- ▶ Easy & quick installation

#### Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations
- DC power options : 12V / 24V / 48V / 110 ~ 125V

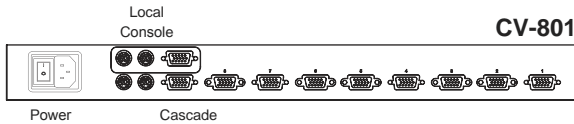

#### Ordering Information


Console	Local	Remote	IP	8-port
	1	0	0	<b>CV-801</b>

#### KVM Specification

<b>■ KVM Port</b>	
Number of ports:	8
Connector:	DB-15 combo connector
Connectivity:	PS/2 3-in-1 KVM cable, up to 6, 10 & 15 feet
<b>■ Local Console</b>	
Graphic Connector:	1 x DB-15 VGA
Resolution:	Up to 1600 x 1200
Input device:	2 x PS/2 for keyboard & mouse
<b>■ Management</b>	
OSD:	English
Hotkey:	Scroll-lock
Security:	Password enable & disable
PC Selection:	Front button, OSD menu & hotkey
<b>■ Expansion:</b>	Up to 64 servers by 8-level cascade
<b>■ Compatibility</b>	
Hardware :	HP / IBM / Dell PC, Server and Blade Server SUN / Mac
OS Support :	Windows / Linux / Unix / Mac OS

<b>■ Power</b>	
Input:	Auto sensing 100 to 240VAC, 50 / 60 Hz
Option DC:	12V / 24V / 48V / 110 ~ 125V DC input
Consumption:	Max. 12W
<b>■ Regulatory</b>	
Safety:	FCC & CE certified
Environment:	RoHS2 & REACH compliant
<b>■ Environmental</b>	
Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration
<b>■ Product Information</b>	
Dimension (W x D x H) :	443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch
Net weight :	3 kg / 6.5 lb
<b>■ Packing Information</b>	
Dimension (W x D x H) :	500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
Gross weight :	5 kg / 11 lb

## KVM port connection

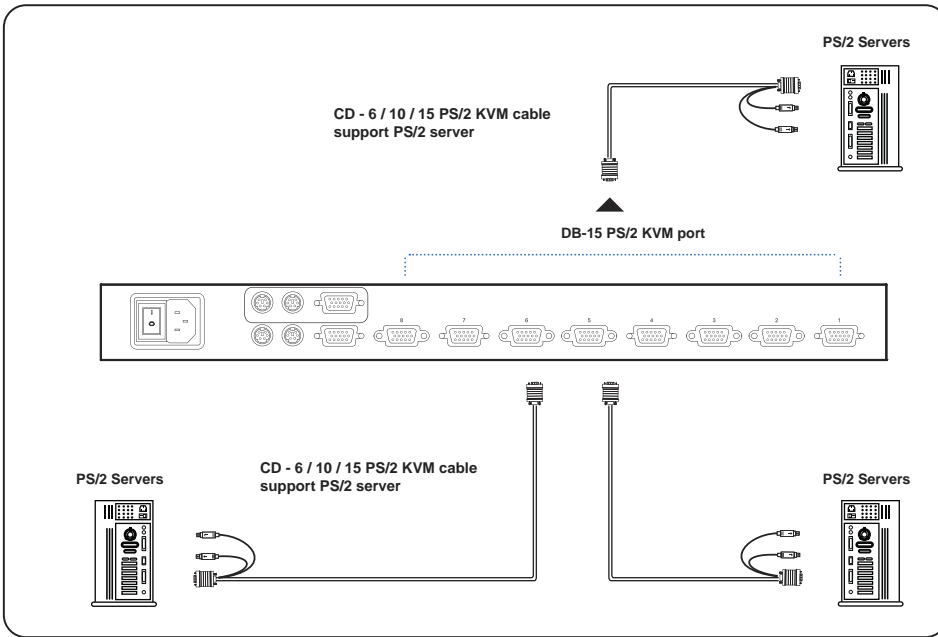

### CD-6 / CD-10 / CD-15

- 6 / 10 / 15 ft PS/2 KVM cable
- Support PS/2 server

**!** For detailed product specifications and options, please download the user manual from the link below : [www.austin-hughes.com/support/usermanual/cyberview/UM-CV-PS2KVM.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-PS2KVM.pdf)

## KVM Cascade

- Cascade up to 8 levels, 64 servers
- Cascading multiple KVM with CA-6 cascade cable.

