






Benefits

- ▶ 1U 19" widescreen LCD Quad display drawer
- ▶ 1440 x 900 native resolution / 16.7M colors
- ▶ VGA + Quad Display (Composite BNC x 4) video input
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front panel and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- DC power : 12V / 24V / 48V / 125V / 250V

RP-W119QD

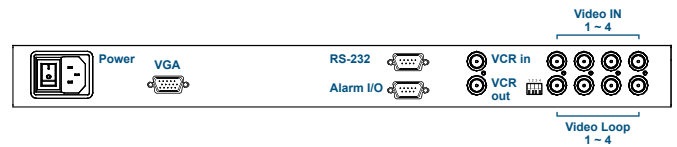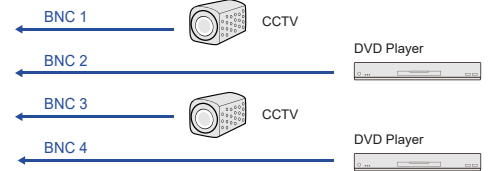

Product Specifications

Video	
Video input (NTSC only)	QD (Composite BNC x 4) + VGA

LCD Panel	
Panel size (diagonal)	19"
Native resolution	1440 x 900
Brightness (cd/m ²)	250
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80
Response time (ms)	5
Dot pitch (mm)	0.2835
Display area (mm)	408.24H x 255.15V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 20W
	Power saving mode	Max. 2W
	Power button off	Max. 1W

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Mounting Distance	
Display drawer	660 ~ 890 mm 26 ~ 35 inch

Physical		
Dimensions (W x D x H)	Product	445 x 650 x 44 mm
	Packing	17.5 x 25.6 x 1.73 inch
Weight	Net	595 x 860 x 140 mm
	Gross	23.4 x 33.9 x 5.5 inch
	Net	13.5 kg / 29.7 lb
	Gross	17.5 kg / 38.5 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Diagrams (mm)

