



DisplayPort 1.2 Optical Extender with Diagnosis feature



User Manual DPX-1F12-TR

Manual Contents

Manual Contents	1-0
Welcome! Product Description	1-1
System Requirements for Setup	1-2
Installation	1-3
Troubleshooting, Maintenance, Technical Support, and Service	1-5
Product Specifications	1-6
Warranty Information	1-7
Certifications	1-8

Pictorials

Figure 1 – Overall Connection of DPX-1F12-TR	1-1
Figure 2 – Position of the LED	1-3
Figure 3 – Connection of optical fiber	1-4

Welcome!

Congratulations on your purchase of the DisplayPort 1.2 optical extender with Diagnosis feature, DPX-1F12-TR. This manual contains information that will assist you in installing and operating the product.

Product Description

DPX-1F12-TR is a high-performance DisplayPort fiber optical extender, transmitting 4K (4096x2160) at 60Hz up to 300m (984 feet) over one (1) LC multi-mode fiber (OM3). It supports MST (Multi-Stream Transport) and meets DisplayPort 1.2 standards, transmitting uncompressed and transparent video signals. It offers 3-meter extension for both transmitter and receiver sides, enhancing installation flexibility.

When connecting with BR-600, the built-in Diagnosis function allows remote monitoring and management for ensuring real-time error detection and reduced downtime.

Combining robust performance, advanced diagnostics, and versatile extension options, the DPX-1F12-TR is an ideal solution for demanding AV installations.

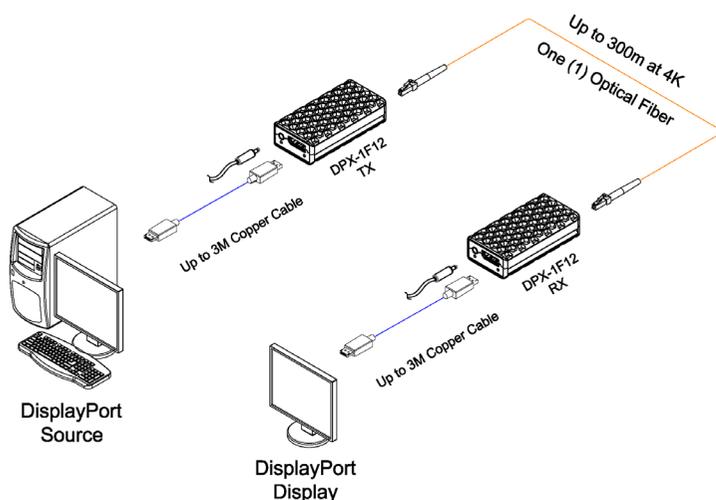


Figure 1 – Overall Connection of DPX-1F12-TR

1-1 Welcome, Product Description

System Requirements for Setup

- Hardware requirements**
 - You must have a DisplayPort source and display. It should support the maximum graphic resolution feature of displays to be connected.
 - No special requirements of memory size, CPU speed and chipsets, if you've already properly installed your DisplayPort systems or graphic cards.
 - Proper initial trial of the entire platform with its application using a short length copper cable is recommended prior to the installation with the optical link.
- Software requirements**
 - No special restrictions, if you've already properly installed your DisplayPort systems.
 - FW upgradable via USB Type-C: contact techsupp@opticis.com to download the most recent FW version.
- Power Technical Advisory**
 - Enclosed Power Adaptors should supply power for both Transmitter and Receiver.
- Connection Advisory**
 - It is highly recommended that DisplayPort source is connected to DisplayPort display output via DPX-1F12-TR without any connection with incompatible distributor, switcher and selector.

The Shipping Group of DPX-1F12-TR;

- One (1) Transmitter (TX) and One (1) Receiver (RX)
- Two (2) 2m Male to Male DP copper cable
- Two (2) 5V 1A power adapter
- User Manual

※ In shipping group, two 2m copper cables are included. Contact the regional sales representative or tosales@opticis.com for using 3m copper cable.

1-2 System Requirements for Setup

Installation

Important: Please keep the installation procedure below. Failure in operation may result if the start-up sequence is not correctly followed.

Step 1

Carefully unpack the contents in the shipping group.

Step 2

Power on the DisplayPort source and display. The external power is recommended for the stable power supply for both the transmitter and receiver.

Step 3

The Power LED will be turned on and the Status LED will blink three (3) times. Once the full connection is established, the Status LED will blink blue regularly every 0.5 seconds.

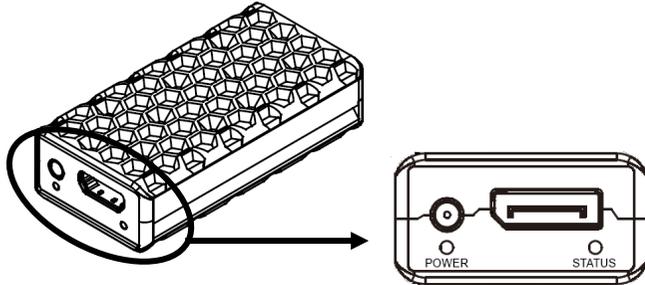


Figure 2 – Position of the LED

Step 4

Connect one (1) LC optical fiber between the transmitter and the receiver. Ensure the connectors are fully engaged and then, the blue LED will begin to blink regularly every 0.5 seconds.

Step 5

Connect the transmitter and the receiver to the source and the display respectively via 2m copper cable provided in the shipping group.

Note: If the connectors are fully engaged, the bottom LED will turn on.

1-3 Installation

Step 6

If the system does not work properly, go to the page 1-5 for trouble shooting.

Note1: Please DO NOT look directly into the LC receptacles of the Transmitter, while it is powered on. Although this product is regulated strictly enough to operate under the LASER Class I, classified by CDRH/FDA for eye safety, it is not recommended to do so.

Note2: The maximum extension length by OM3 fiber is 300 meters (984ft.).

Note3: It is recommended NOT to use any intermediate cable or adapter that is not provided in the shipping group between the modules to avoid undesirable performance degradation.

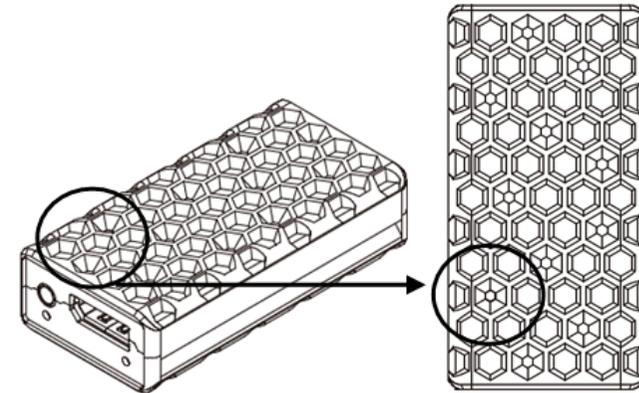


Figure 3 – Position of the additional status LED

▪ LED Indicator

	BLUE	GREEN
Status LED	Blinks (0.5s interval, normal connection)	Blinks (0.24s: Fiber disconnected 0.5s: Cable disconnected)
Power LED	Fixed in Blue Color	

1-4 Installation

Troubleshooting

The display shows black screen.

- ❑ Ensure that all the plugs and jacks used by DC power supplies are firmly connected. Ensure that the LED is ON.
- ❑ Ensure that the DisplayPort is firmly plugged into the DisplayPort source and display.
- ❑ Ensure that the transmitter and receiver modules are plugged correctly to the source and display, respectively.
- ❑ Check if the DisplayPort source and display are powered on and properly booted.
- ❑ Reset the system by de-plugging and re-plugging the transmitter or receiver, or by de-plugging and re-plugging the DC power adapters that are plugged to the transmitter and receiver module.
- ❑ Re-boot up the system while connecting the module.

Screen is distorted or displays noises.

- ❑ Check if the graphic resolution is properly set. Go to the display Properties and tap the settings. Ensure that the resolution sets less than 4K (4096x2160) at 60Hz refresh ratio.
- ❑ Reset the system.
- ❑ Power down, disconnect and reconnect the optical system cable or DC power adaptors, and power up again.

Maintenance

No special maintenance is required for the optical system cables and power supplies. Ensure that the cables and power modules are stored or used in a benign environment free from the liquid or dirt contamination.

There are no user serviceable parts. Refer all service and repair issues to Opticis or its authorized distributor.

Technical Support and Service

For commercial or general product support, contact your reseller. For technical service, contact Opticis by email techsupp@opticis.com or visit its website at www.opticis.com

Product Specifications

- ❑ **Extends up to 4K (4096x2160) at 60Hz.**
- ❑ **Supports DisplayPort 1.2 standards** for seamless high-definition audio and video
- ❑ **Transmits data up to 300 meters (984 feet) over one (1) LC multi-mode fiber (OM3)**
- ❑ **Extra copper extension** available up to **3m** on each side (TX/RX)
- ❑ **Supports Multi Stream Transport**
- ❑ **Data security** with negligible **EMI emission**
- ❑ **Diagnosis Link Manager (GUI program)** will be provided to manage **firmware upgrade** and **diagnosis feature**
- ❑ **Firmware upgradable** via USB-C Type port
- ❑ **Compatible with Power Rack (BR-600)**, support up to **8 units Opticis diagnosis extenders**, and offer one step feature at once time
- ❑ **Diagnosis features** able to check the **status of product** and **manage them from a long distance**
- ❑ **Firmware upgradable** via USB Type C port
- ❑ **Mechanical specifications of transmitter and receiver**
 - **Dimensions** (WDH): 39mm x 76mm x 20mm
- ❑ **Environmental Specifications**
 - Operating temperature: 0°C to 50°C
 - Storage temperature: -30°C to 70°C
 - Humidity: 10% to 85%

AC/DC Power Adapter

- ❑ **Power Input:** AC 100-240V, 50/60Hz.
- ❑ **Power Output:** +5 V, 1A SMPS DC-power Adapter

Warranty Information

1 (One) Year Warranty

Opticis warrants this optical DP module to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Opticis or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Opticis shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product.

All products that are replaced will become the property of Opticis.

Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer.

Opticis shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to Opticis for repair under warranty or not.

Warranty Limitation and Exclusion

Opticis shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Opticis or its authorized agents, causes other than from ordinary use or failure to properly use the product in the application for which said product is intended.

Dispose of Old Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

Certifications

CE, FCC, Laser safety Class 1 laser product (IEC 60825-1)



Caution – Use of controls or adjustments or performances of procedures other than those specified herein may result in hazardous radiation exposure.

Opticis Locations

OPTICIS HQ

Opticis Co., Ltd.

3F, 305, Sanseong-daero

Sujeong-gu, Seongnam-si

Gyeonggi-do, 13354

South Korea

Tel: +82 (31) 719-8033

Fax: +82 (31) 719-8032

www.opticis.com

For order support, please contact your Distributor or Reseller.

For technical support, check with the Opticis web site www.opticis.com or contact techsupp@opticis.com