

INDEX

1. User Switch Setting.....	01
2. Audio Input Pin Definition.....	01
3. Notice.....	01
4. Optional accessory.....	02
5. Drawing.....	02
6. Specifications.....	02
7. Dimensions.....	03

User Switch Setting:

SW1	SW2	INPUT
OFF	OFF	Composite(CVBS)
ON	OFF	S-Video(Y/C)
OFF	ON	R.G.B.(sync on green)
ON	ON	Component(YPbPr)

SW3	ON	AUDIO L/R INPUT
	OFF	AES INPUT

Audio Input Pin Definition:

Pin 1	AES 1 IN	Pin 9	GND
Pin 2	AES 2 IN	Pin 10	GND
Pin 3	AES 3 IN	Pin 11	NC
Pin 4	AES 4 IN	Pin 12	NC
Pin 5	Audio L IN	Pin 13	NC
Pin 6	GND	Pin 14	NC
Pin 7	GND	Pin 15	Audio R IN
Pin 8	GND		

Notice:


Power LED indicator:

This indicator will become green, once SDI input has been detected. If input signal is not detected, this LED indicator will flicker.

Optional accessory:

Audio Cable * 1

Drawing:

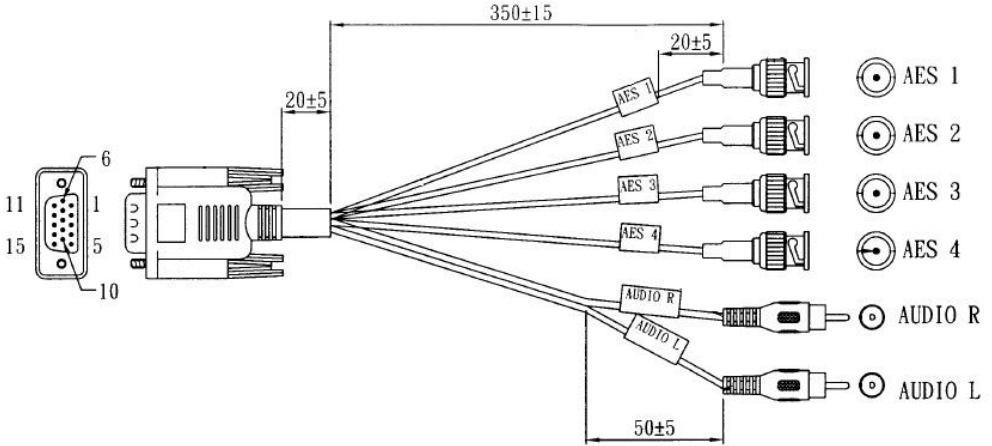


Unit: mm

Specifications:

Output (connect to Converter)	Input	
D-Sub (15 pin) *	AES1	BNC * 1
	AES2	BNC * 1
	ASE3	BNC * 1
	ASE4	BNC * 1
	AUDIO L	RCA * 1
	AUDIO R	RCA * 1

Dimensions :

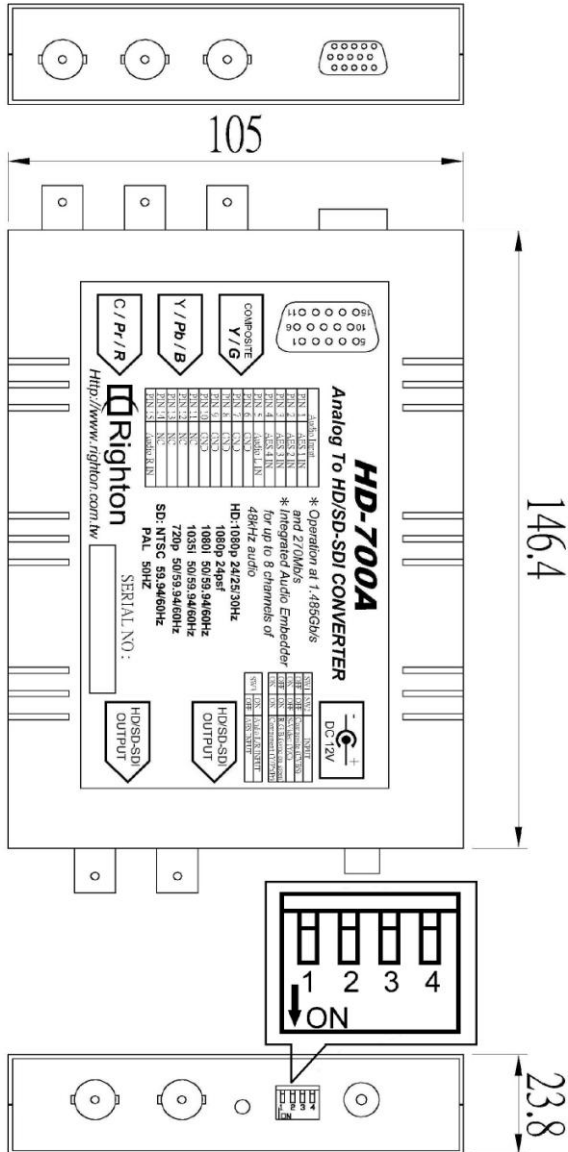

Unit: mm