


ENR-1100

9-Channel Desktop Standalone NVR



- 2-bay Desktop Standalone NVR
- Maximum Number of Video Devices: 9
- Free License: 9
- Event trigger, response and notification
- Web Client, Mobile Client

► Solution Diagram

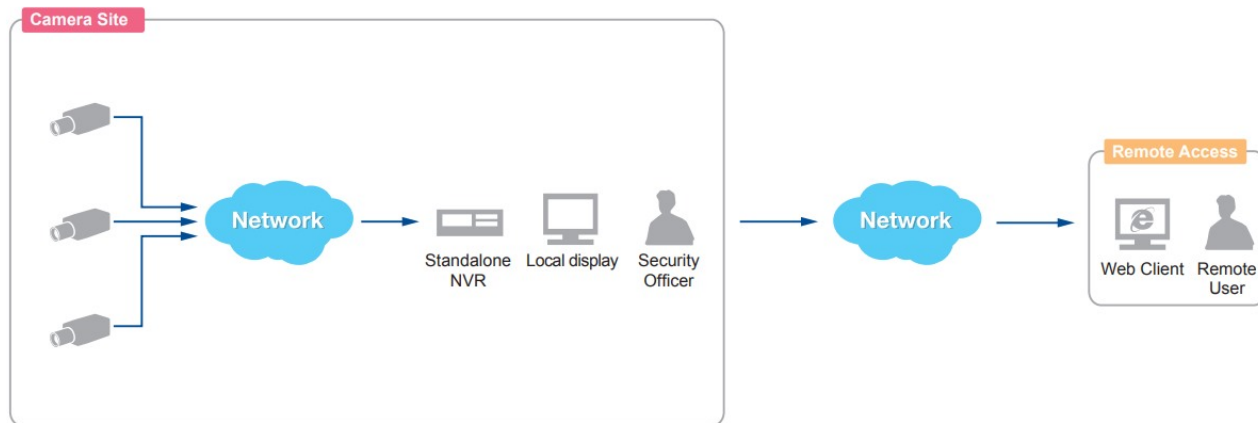

Remote User: Administrator / Supervisor / Manager / Security Officer

► Specifications

Device

Product Type	Standalone NVR
Maximum Resolution	Local: up to 2MP; Remote: up to 10MP
Maximum Number of Cameras	9

Maximum Number of Video Devices	9
Maximum Number of Clients	Local: 1, Remote: 2

License

License required	No
Free License	9

Live View

Display Layout Mode	Local:1,2,4,8,1+5,1+7,2+4 Remote:1,2,4,9,1+5,1+7,2+4
Fisheye Dewarping	No
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client
Instant Playback	Instant Playback in live view window (Remote client)

PTZ

PTZ Control	32 preset points
Joystick	USB based joystick supported

Video

Compression	H.264
-------------	-------

Network

Ethernet Port	Total ports: 2 port(s) Non-PoE: 2 port(s), Ethernet (1000 Base-T), RJ-45 connector
---------------	--

Recording

Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Maximum Recording Throughput	36 Mbps 9 channels at 1080p/30fps

Search & Playback

Playback Control	Continuous forward and backward playback with speeds 0.5x/1x/2x/4x/8x/16x/32x, pause, stop
Synchronized Playback	9 channels

Event

Event Trigger	Video motion detection, External device through digital input, Network loss and recovery
Event Response	Go to PTZ preset point or preset tour, E-mail notification with snapshots, Play alert sound, Activate external device through digital output

System

Permission control	Unlimited number of users, Customizable permissions for user groups
Client PC Operating System	Windows 7 SP1, Windows 8.1
Server Operating System	Embedded Linux
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, Mobile device application (ACTi Mobile Client) supports PTZ Control, Mobile device application (ACTi Mobile Client) supports Event/time based search and playback, Supported device(s) iPhone, Supported device(s) Android device
USB	2-Port USB 2.0
Language	Multi-Language
System Status Monitor	Real time status reports on remote browser

Integration

Unified Solution	Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)

Storage

Storage Bay	SATA, Max. 2 Disk(s)
-------------	----------------------


Interface

Local Access	USB keyboard & mouse, USB Joystick
Local Display Interface	HDMI x 1,

General


Power Source	DC 12V
Power Consumption	50 W (DC)
Weight	1320g (2.93lb)
Dimensions	(W x H x D): 135mm x 121mm x 241mm (5.3" x 4.8" x 9.5")
Fan	Yes
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% RH
Remote Access	Web Client, Mobile Client
Approvals	CE, FCC, UL (for bundled power adapter)
Warranty	2 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

▶ Photo Indication

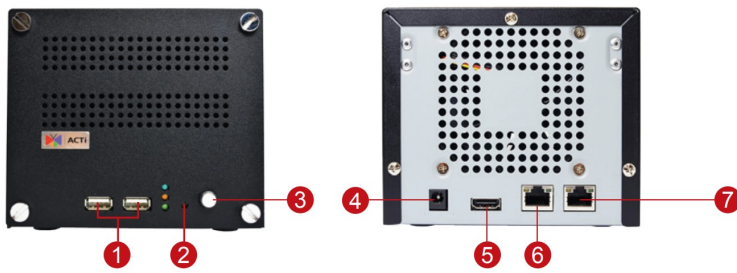

- 1 USB 2.0 Ports
- 2 Reset Button
- 3 Power Button
- 4 DC 12V Power Input
- 5 HDMI Port
- 6 LAN1
- 7 LAN2

▶ Dimension Diagram

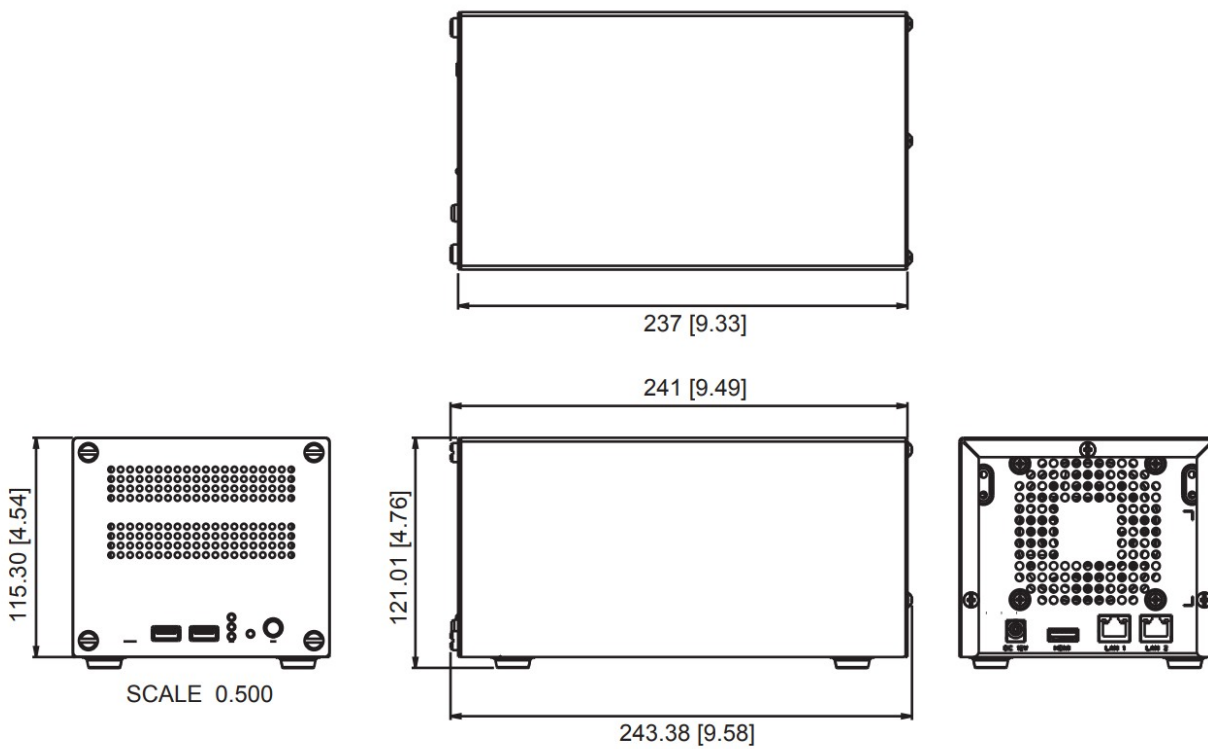

Unit: mm [inch]

▶ Related Products

Controllers - Joystick

PJSK-0100



Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)