



### Benefits

- ▶ 1U 17" LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ Ultra short depth 480mm / 18.9"
- ▶ 1920 x 1080 native resolution / 16.7M colors ( 8-bit )
- ▶ HDMI 1.4 + DP 1.2 + VGA video input / USB KB / MS
- ▶ Dual stereo speakers for HDMI 1.4 & DP 1.2
- ▶ Ideal for open rack / short depth rack
- ▶ 104-key keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty ( upgradable up to 5 years )

### Options

- 3G / HD / SD-SDI Broadcast-grade input ( SDI )
  - DC power : 12V / 24V / 48V / 125V / 250V
  - SUN Micro keyboard available
  - KVM integration : Refer to dual slide DF117 series
- [www.austin-hughes.com/PS-CV-DF117.pdf](http://www.austin-hughes.com/PS-CV-DF117.pdf)

## Product Specifications

| Console Port          |   |
|-----------------------|---|
| Video input           | HDMI 1.4 + DP 1.2 + VGA                   |
| KB / MS               | USB interface                             |
| Console cable bundled | HDMI 1.4 cable x 1 + USB type A cable x 2 |

| LCD Panel                        |                          |
|----------------------------------|--------------------------|
| Panel size ( diagonal )          | 17.3"                    |
| Native resolution                | 1920 x 1080              |
| Brightness ( cd/m <sup>2</sup> ) | 300                      |
| Contrast ratio ( typ. )          | 1000 : 1                 |
| Colors                           | 16.7 M, 8-bit            |
| Viewing angle ( L/R/U/D )        | 85/85/85/85              |
| Response time ( ms )             | 25                       |
| Dot pitch ( mm )                 | 0.1989                   |
| Display area ( mm )              | 381.888H x 214.812V      |
| Surface treatment                | Anti-glare, Hard-coating |
| Surface hardness                 | 3H                       |
| Backlight type                   | LED                      |
| MTBF ( hrs )                     | 15,000                   |

| Physical              |   |
|-----------------------|---|
| Product ( W x D x H ) | 442 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch |
| Packing ( W x D x H ) | 590 x 622 x 140 mm / 23.2 x 24.5 x 5.5 inch |
| Net weight            | 10.6 kg / 23.4 lb                           |
| Gross weight          | 15.6 kg / 34.4 lb                           |

\* All dimensions stated are subject to change if options are selected / integrated to base model part codes

| Mounting Distance     |                                 |
|-----------------------|---------------------------------|
| Single console drawer | 490 ~ 720 mm / 19.3 ~ 28.3 inch |


| Power                       |                                       |                     |
|-----------------------------|---------------------------------------|---------------------|
| Input                       | Auto-sensing 100 to 240VAC, 50 / 60Hz |                     |
| Consumption (console / KVM) | Screen on                             | Max. 14W / Max. 45W |
|                             | Power saving mode                     | Max. 2W / Max. 34W  |
|                             | Power button off                      | Max. 1W / Nil       |

| Environment            |                                    |
|------------------------|------------------------------------|
| Operating temp.        | 0 to 55°C degree                   |
| Storage temp.          | -20 to 60°C degree                 |
| Operating humidity     | 10~90%, non-condensing             |
| Storage humidity       | 5 ~90%, non-condensing             |
| Operating altitude     | 16,000 ft                          |
| Non-operating altitude | 40,000 ft                          |
| Shock                  | 10G acceleration ( 11ms duration ) |
| Vibration              | 10~300Hz 0.5G RMS random vibration |

| Compliance  |                      |
|-------------|----------------------|
| EMC         | FCC & CE             |
| Safety      | CE / LVD & UKCA      |
| Environment | REACH & RoHS3 / WEEE |

## Standard Keyboard

**Ge** G keyboard with touchpad

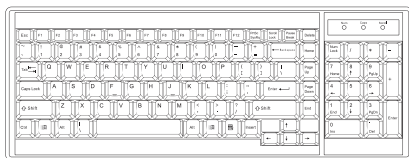

## Keyboard Options

\* US layout only

**Se**

S keyboard with touchpad



## Supporting layouts

|         |       |         |        |        |       |       |
|---------|-------|---------|--------|--------|-------|-------|
| America |       |         |        |        |       |       |
|         | U.S.  |         |        |        |       |       |
| EMEA    |       |         |        |        |       |       |
|         | U.K.  | Germany | France | Russia | Spain | Italy |
|         | Asia  |         |        |        |       |       |
|         |       | Japan   |        |        |       |       |
|         |       |         |        |        |       |       |
|         | Korea |         |        |        |       |       |