



# HS-NBB360

## NVR Network Video Recorder

- Plug & Play supported.
- Multi stream supported.
- Mobile remote surveillance. (iPhone/ iPad/ Android)
- 2 way audio. (conference)
- Recording retention function supported.
- USB or remote firmware upgrade supported.
- Support 16 CH simultaneous playback. 1 / 4 / 9 / 16 CH
- Network online user management.
- Multi-user online simultaneously.
- Recorded file protection supported.
- IE browser supported. (Windows)
- Support ONVIF / RTSP connection

**RoHS** CE FC






WITH CAMERA



# HS-NBB360

Caution : IVS playback must work with certain model IPC.

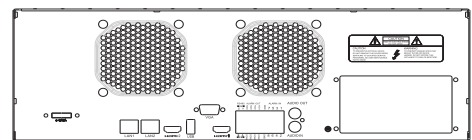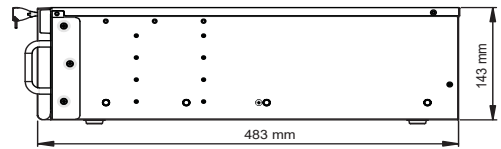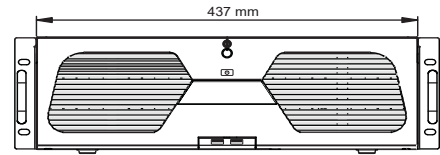

System	
Compression	H.265 / H.264
Operating System	Embedded Linux
Video	
Network Input	128CH
Network Access Bandwidth	384Mbps
Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
Output	HDMI × 2 : HDMI 1: 4K × 2K / 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI 2: 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
Audio	
Network Input	128 CH
2-way Audio	RCA × 1
Local Output	RCA × 1
Record	
Record Stream	Triple / Dual / single stream recording
Mode	Manual / timer / motion / sensor
Playback	
Simultaneous Playback	Max 16 CH
Search	Date & Time search / Event search
Function	Play / pause / FF / FB / digital zoom
Alarm	
Mode	Manual / sensor / motion / exception
Alarm Input ( IPC )	128 CH
Alarm Input ( NVR )	8 CH
Alarm Output ( IPC )	128CH
Alarm Output ( NVR )	4 CH
Triggering	Record / snap / preset / e-mail / APP push message

External Interface	
Network Interface	RJ45 10 / 100 / 1000 Mbps × 2
Serial Interface	RS485 × 2 (Keyboard x1, PTZ x1)
USB Interface	USB 2.0 × 2 ( front panel ) USB 3.0 × 1 ( rear panel )
Network	
Protocol	TCP / IP / PPPoE / DHCP / DNS / DDNS / UPnP / NTP / SMTP / RTSP / ONVIF
Network-Function	Support licensed CMS(100CH) / EMAP / IE
Web Client	Max 20 users online
Client Application	Display / Playback / Backup / DVR control / PTZ Control
Storage	
SATA	16 ( Hot Swapping HDD )
e-SATA	1
Capacity	Max 10TB/Each
RAID	0 / 1 / 5 / 6 / 10
Backup	
Local Backup	USB disk / USB mobile HDD ( limited )
Network Backup	Yes
Mobile Device	
Operating System	iOS / Android
Others	
Power Supply	ATX ( AC 110V / 240V )
Consumption	≤ 30W ( without HDD )
Dimensions	437 × 483 × 143 ( W × D × H ) mm
Operating Temperature	-10 ~ 50 °C
Operating Humidity	10% ~ 90% humidity
Weight	10.326 KG