



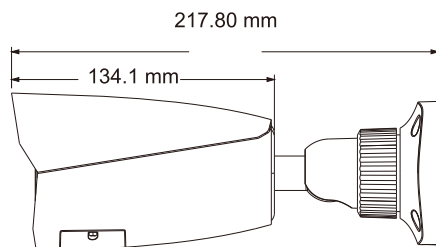

IP CAMERA HS-T058TQ-H



- H.265 / H.264
- 2MP (1920 × 1080)
- 30 ~ 50 M IR night view distance
- 3 DNR, DWDR, HLC, BLC, Digital Defog
- ICR auto switch, true day / night
- Built-in micro SD card slot, up to 128GB
- Support ROI coding
- Support three streams
- IP67 ingress protection
- Intelligent analytics: Exception, Line Crossing, Intrusion

RoHS CE FC





HS-T058TQ-H

Camera	
Image Sensor	1 / 2.8 " CMOS
Image Size	1920 × 1080
Electronic Shutter	1 s ~ 1 / 100,000 s
Min. Illumination	0.0035 lux @F1.2,AGC ON; 0 lux with IR 0.009 lux @F1.6,AGC ON; 0 lux with IR
Lens	VF 2.8 ~ 12 mm @F1.4
FOV	Horizontal: 88° ~ 34.8° Vertical: 57° ~ 20° Diagonal: 96° ~ 39.6°
IR Distance	30 ~ 50 M
WDR	Digital WDR
Day & Night	ICR auto switch
BLC	YES
HLC	YES
Digital Defog	YES
Digital DNR	3 DNR
Image	
Video Compression	H.265 / H.264
H.265 Compression Standard	Main Profile @Leve4.1 High Tier
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream (S1)	1080P / 720P @30fps
Sub Stream (S2)	D1 / CIF @30fps
Third Stream (S3)	D1 / CIF / 480 × 240 @30fps
Bit Rate	64 Kbps ~ 4 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen,NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Audio	
Audio Compression	G.711A / U
Two-way audio	-
Interfaces	
Network	RJ45
Video Output	-
Audio line in	1CH audio input
Audio line out	-
Alarm Input	-
Alarm Output	-
Storage	
SD card	Built-in micro SD card slot; up to 128GB
Network remote storage	YES
Hardware Reset	YES

Functions		
Remote Monitoring	Web browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 3 users Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, FTP, UPnP, HTTPs, HTTP, QoS	
Interface Protocol	ONVIF	
Smart Alarm	Motion detection; SD card full; SD card error	
Intelligent Analytics	Exception, Line Crossing, Intrusion	
General function	Watermark, IP address filtering, Video mask, Heartbeat, Illegal login lock	
PoE	YES, IEEE802.3af	
Others		
Power Supply	DC12V / PoE	
Power Consumption	< 7.5W	
Operating Environment	- 30 ° C ~ 60 ° C (-22° F ~ 140° F) Humidity: less than 95 % (non-condensing)	
Dimensions	217.8 × 80.5 × 80.3 mm	
Weight	Approx. 650g	
Installation	Ceiling mounting; wall mounting	
Ingress Protection	IP67	
Accessories		
B627	B640	B639
B615	B616	B628