

HI SHARP Brand Series


HS-6IN1-T090B7

Product Features

- High video quality on HD 5MP
- HD video transmission without video quality loss & delay
- Long transmission distance
- The same connection structure as original analogue system without cable (Coax / UTP) changing
- Vari-focal Lens: 2.8 mm~12 mm
- 2D DNR
- Support CoC (UTC) to operate OSD menu



Dimension (mm)

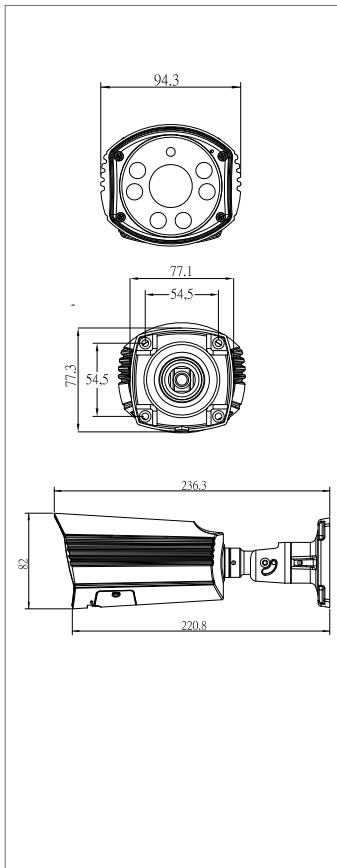

Specifications

Model	HS-6IN1-T090B7
Pick Up device	1/2.8" SONY CMOS : 5.0 Mega
Solution	SONY 335 + FH8538M
Resolution	2592(H) x 1944(V)
Video Output	AHD / CVBS / TVI / CVI
S/N Ratio	More than 50 dB
Min. Illumination	0.1Lux
Lens	VF 2.8 mm~12 mm
Camera Control	CoC
IR Distance	30M
D-WDR	Yes
DNR	2D DNR
Maximum FPS	30fps(NTSC) / 25fps(PAL)
Power Source	DC12V ± 10% / 1A
Operating Temperature	-20° C ~ 60° C (-4° F ~ 104° F)
Dimension (mm)	236.3 x 94.3 x 82
Ingress Protection	IP67