



Scan for full manual

## KW-14T and/or KW-14R Quick Start Guide

This guide helps you install and use your KW-14T and/or KW-14R for the first time.

Go to [www.kramerav.com/downloads/KW-14T](http://www.kramerav.com/downloads/KW-14T) to download the latest user manual and check if firmware upgrades are available.


### Step 1: Check what's in the box

Depending on your purchase, the box contains the KW-14T, the KW-14R, or both devices.

- |   |  |   |
|---|--|---|
| <ul style="list-style-type: none"> <li>✓ KW-14T Wireless HD Transmitter includes:             <ul style="list-style-type: none"> <li>✓ 1 Power adapter</li> <li>✓ 1 HDMI™ 0.9m cable</li> <li>✓ 1 IR Emitter cable</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>✓ KW-14R Wireless HD Receiver includes:             <ul style="list-style-type: none"> <li>✓ 1 Power adapter</li> <li>✓ 1 HDMI 0.9m cable</li> <li>✓ Remote control transmitter with batteries</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>✓ 1 Quick start guide</li> </ul> |
|---|--|---|

### Step 2: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your KW-14T and/or KW-14R.

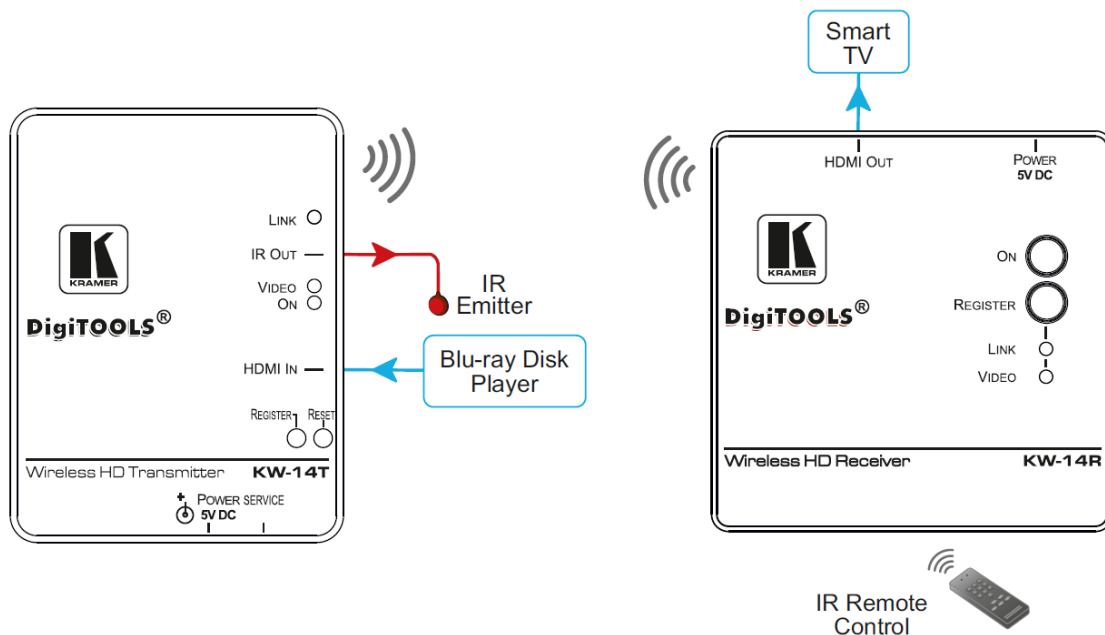

### Step 3: Mount KW-14T and/or KW-14R

Mount the KW-14T and/or KW-14R to a wall or furniture. When mounting, the devices, note the following:

- Mount the receiver(s) no farther than 30m (100ft) from the transmitter (reduce the distance if transmission is not line-of-sight) and no closer than 2m (6.5ft) to the transmitter (be mindful of units located behind walls in adjacent rooms).
- Up to four transmitters can operate in the same room or environment, depending on local regulations.
- When installing more than four transmitters in the same environment, ensure that there is at least a 45m (150 feet) radius around the outermost units in each group



- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Maximum mounting height for the device is 2 meters.



To achieve specified extension distances, use the recommended Kramer cables available at [www.kramerav.com/product/KW-14T](http://www.kramerav.com/product/KW-14T). Using third-party cables may cause damage!

## Step 4: Connect power

Connect the power cord to KW-14T and/or KW-14R and plug it into the mains electricity.



Safety Instructions (See [www.kramerav.com](http://www.kramerav.com) for updated safety information)

**Caution:**

- For products with relay terminals and GPIO ports, please refer to the permitted rating for an external connection, located next to the terminal or in the User Manual.
- There are no operator serviceable parts inside the unit.

**Warning:**

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

## Step 5: Register the Receiver with the Transmitter


Registration needs to be performed when the transmitter or receiver is replaced or when adding additional receivers to a transmitter.



When purchased as a pair in the same box, the KW-14T and KW-14R are delivered pre-registered. No registration is required.



- You can register up to four receivers with a transmitter.
- You can register a receiver with a transmitter using either the buttons on the units or via the IR remote control.
- Registration requires video disconnection.

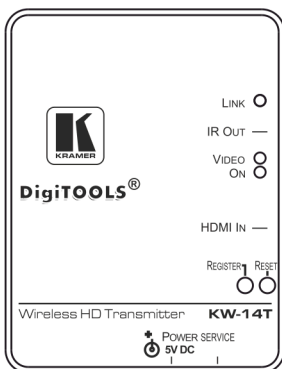


### To register a receiver with a transmitter using the front panel buttons:

1. Press and hold the Register button on the receiver until the following message is displayed on the OSD: "Please activate registration on Transmitter unit".
2. Press and hold the Register button on the transmitter until the following message is displayed on the OSD: "Adding <Kramer 01>. Press OK to continue or EXIT to cancel".
3. Press the Register button on the receiver to confirm. The following message: "Adding <Kramer 01>" and a progress bar are displayed on the OSD while the registration process is completed.



The registration process can take up to 60 seconds to complete.

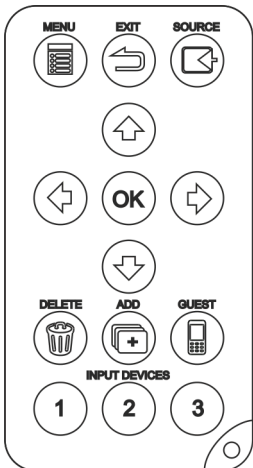

### To register a receiver with a transmitter using the IR remote control:

1. Connect and apply power to the transmitter, input source, receiver, and output acceptor.
2. Press the Add button on the IR remote control. The following message is displayed on the OSD: "Please activate registration on Transmitter unit".
3. Press and hold the Register button on the transmitter until the following message is displayed on the OSD: "Adding <Kramer 01>. Press OK to continue or EXIT to cancel".
4. Press the OK button on the IR remote control to confirm. The following message: "Adding <Kramer 01>" and a progress bar are displayed on the OSD while the registration process is completed.



The registration process can take up to 60 seconds to complete. If the process takes longer than 60 seconds, power cycle both devices and then start the registration process from the beginning. When the registration process is complete, the message and progress bar disappear from the display. The Link and Video LEDs light solid.

5. Repeat steps 1 to 4 to register up to three more receivers to a transmitter.

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.