



19" 1RU Power Supply Frame for Optical Modules BR-400

Description

BR-400, 19" 1RU multi-mounting rack is a modular rack and systematic fiber-optic solution providing flexibility to install Opticis Optical modules up to 8 units.

Each power line of mounting unit is connected to the central bus power of +12VDC at 4.2A. BR-400 can be fit with the dual power supplies for load-sharing and redundant backup. BR-400 adopts two (2) LEDs in the front panel for power supply failure to run the stable system without any disruption or disconnection from the power failure.

***Note: The optical modules are separately sold.**

***DPFX-1F14/DPFX/HDFX-700 optical modules are required the separate screws for installation.**

Specification

- Compact 19" 1RU Power Supply Frame.
- Adopts up to 8 units of Opticis Optical modules
- Available for primary and dual power models for redundancy.
- Supports Load-sharing.
- Input power: 100-240VAC, 50-60Hz

Applications


- Control room
- Medical imaging
- Conference room

19" 1RU Power Supply Frame for Optical Modules BR-400


Technical Features

Applicable Products	DPFX-1F14-TR, DPFX-700-TR, HDPX-700-TR, DPFX-100-TR, M1-201SA-TR, M1-201DA-TR, DVFX-100-TR, DVFX-110-TR, DDFX-100-TR
Max. Number of modules	Up to 8 units
Input Power	12.0V/4.2A (Locking type)
	13.5V/6.5A (Phoenix type)
Load Sharing	Supported
Redundant Power	Supported
Size (LWH)	482 x 210 x 44 mm

Dimension

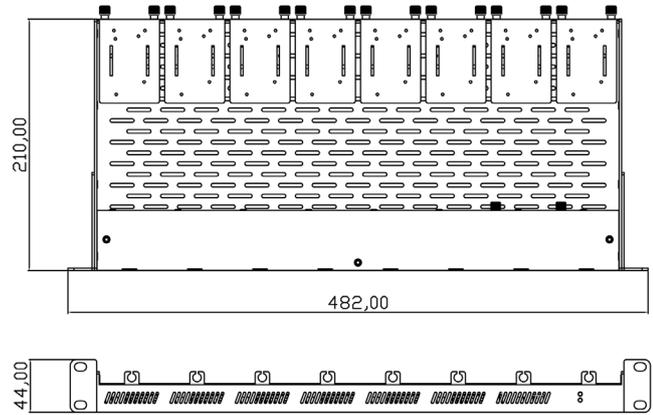

Connection Diagram

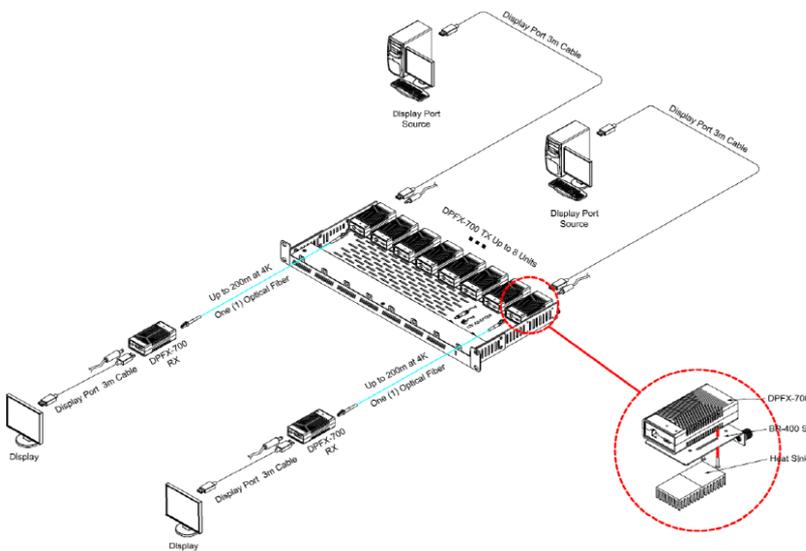

Opticis Co., Ltd.

3F, 305, Sanseong-daero, Sujeong-gu
Seongnam-si, Gyeonggi-do, 13354 Republic of Korea

Tel: +82 (31) 719-8033
tosales@opticis.com

Fax: +82 (31) 719-8032
www.opticis.com



All contents are subject to be changed without prior notice.