

USB-C

# CAAB-P3112-13




## 2 Ports True 4K USB-C KVM Switch with USB 3.2 Gen 1, USB Audio, PD Charging, Hotkey Control

### ► Specifications

|   |  |   |
|---|--|---|
| <b>Model Number</b>   | <b>CAAB-P3112-13</b>                           |   |
| <b>MAX. Resolution</b>  | 4K@60Hz ( 4:4:4 ) ( Main, USB-C )              |   |
| <b>Interfaces</b>   | <b>PC Side</b>                                 | <b>Console Side</b>   |
| <b>Video Switching ( Main )</b>   | USB-C x 2<br>( DP Alternate Mode )             | 4K DP x 1   |
| <b>USB 3.2 Switching</b>  |  | <b>Rear USB :</b><br>USB HID x 3 ( A )<br>USB 3.2 x 1 ( A )                                       |
| <b>USB Audio Switching</b>  |  | <b>Front USB :</b><br>USB HID x 1 ( A )<br>USB 3.2 x 1 ( A )<br>SPK x 1 ( Out )<br>MIC x 1 ( In ) |
| <b>USB-C Bandwidth Allocation*</b><br>( Apply 4-Lane + U2 in Most Cases ) | 4-Lane + USB 2.0<br>-----<br>2-Lane + USB 3.2  |   |
| <b>MAX. USB-C PD</b>  | PC1 : 20V@3A<br>PC2 : 20V@3A                   |   |
| <b>Control Methods</b>  | Push Button / Hotkey ( USB HID )               |   |
| <b>HDCP Compliance</b>  | HDCP 2.2 & HDCP 1.4                            |   |
| <b>Hot Plug-and-Play</b>  | Yes  |   |
| <b>Push Buttons</b>   | PC Select x 1                                  |   |
| <b>Slide Switches</b>   | USB-C Bandwidth x 1                            |   |
| <b>LED Indicators</b>   | PC-Ready x 2, PC-Select x 2                    |   |
| <b>Power supply</b>   | DC 19~21V                                      |   |
| <b>Operation Environment</b>  | 0~40°C, Humidity<80%<br>( Storage : -20~60°C ) |   |
| <b>H x W x D ( mm )</b>   | 44 x 160 x 100 ( Weight : 650g )               |   |
| <b>Material</b>   | Metal  |   |

### ► Features

- Allows 2 PCs Share 1 Set of KVM Console
- **USB-C Video ( Main )** Supports Most Popular Resolutions Up to 4K@60Hz ( 4:4:4 )
- **20V USB-C PD** Allows User to Flexibly Deliver USB-C Power and Keeps the Laptop Plugged-in, Also Supports USB 5V Charging Up to 3A
- **USB-C Bandwidth Allocation** Allows Wider Compatibility Including Two Types :
  - 4-Lane + USB 2.0 ( Apply in Most Cases )
  - 2-Lane + USB 3.2 Gen 1
- **USB Audio** Simplifies Physical Connections with Unique USB Audio Allocations :
  - 0 : Disable USB Audio
  - 1 : USB MIC Only
  - 2 : USB SPK & MIC
  - 3 : USB SPK Only
- **HDCP 2.2 and HDCP 1.4 Compliance**
- **USB 3.2 Gen 1** Provides Excellent 5 Gbps Speed
- **Front USB** Allows Easy Access

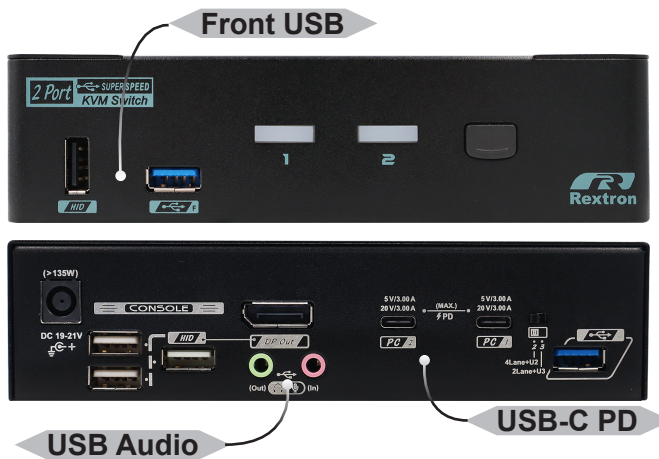

### ► Order Information

| Model          | Video                                       | USB-C PD                  |
|----------------|---|---------------------------|
| CAHBP-P3132-13 | Triple-Monitor<br>( 4K USB-C + DP 1.4 x 2 ) | MAX.<br>120W<br>( Total ) |
| CAHBP-P3122-13 | Dual-Monitor<br>( 4K USB-C + DP 1.4 x 1 )   |                           |
| CAAB-P3112-13  | Single-Monitor<br>( 4K USB-C )              |                           |

\*Certain Models Available Upon Bulk Orders

### ► Connection pattern

