SC-MA16VDA

AHD/TVI/CVI/CVBS Multi-format Video Distributor

SC-MA16VDA are video signal distributor supporting various input & output signal (AHD, TVI, CVI, CVBS).

Those support UTC function for camera PTZ control and OSD setting at remote place through coaxial cable . So, seperate control line is not necessary.

Features

- 1 IN/ 16OUT video signal distributor
- Various signal input & output (AHD, TVI, CVI, CVBS)
- UTC function for HD Analog signal
- Video signal output with same resolution of Input signal
- Video signal output without signal loss
- Surge protection circuit built-in



[SC-MA16VDA]


[Front]



SC-MA16VDA UTC Function (DVR PORT)

Signal					Switch #4
AHD	1280x720p 25/30Hz, 1920x1080p 25/30Hz	ON	OFF	OFF	N/A
TVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz	OFF	ON	OFF	N/A
CVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz	OFF	OFF	ON	N/A

Connection Diagram

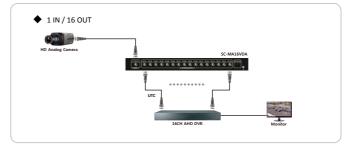

Specifications

N46	DEL	66.1416)/D4		
MODEL		SC-MA16VDA		
Video Input		AHD, CVI, TVI, CVBS(Select one)		
Video Output		4 of same video format with Input signal		
Power Input		DC 12V / 1.5A		
UTC	HD Analog	DVR Port / 1280x720p 25/30Hz, 1920x1080p 25/30Hz		
	Video In	BNC-F, 1 IN		
Connection port	Video Out	BNC-F, 16 OUT		
port	Power In	DC JACK		
LED	RED	Power In		
LED	GREEN	Video In		
Power consumption		500mA		
Temperature / Humidity		-10°C ~ +50°C / 0 ~ 80%		
Case / Weight		Steel / 3.2kg		
Dimensions (mm)		430(W) x 350(H) x 44(D)		

Dimensions

