



QSKM-3114 (HDMI 2.0)

QSKP-3114 (4K DP)

4 Ports True 4K Multi-View KVM Switch with Seamless Switch, PiP, Quad-View, 1+3 PbP, Serial Control, Keypad IN

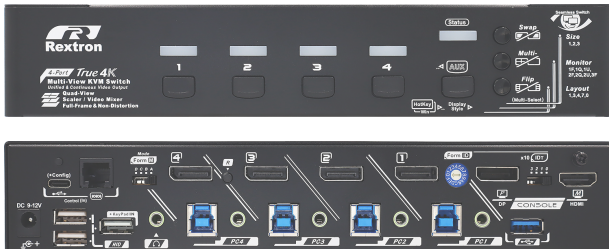


[QSKP-3114]

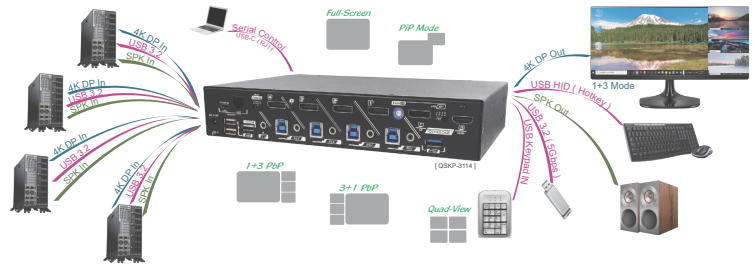

Features

- **Most Popular Resolutions** Supported Up to 4K@60Hz (4:4:4) & 16:9 / 21:9 / 32:9 Aspect Ratios
- **Multi-View Modes** Allows 4 Computers Shown on the Monitor at the Same Time
- **Unique Full-Frame Multi-View Technology** Ensures Uncut, Undistorted, Pixel-to-Pixel Matched Views
- DP Model Equipped with a Duplicated Extra HDMI Output (QSKP-3114)
- Flexible Display Modes (Layouts) for Various Scenarios
 - **Single-View** (Full-Screen)
 - **Quad-View** (Linear Tracking Mouse Roaming)
 - **PiP Mode** (Adjustable View Size / Transparency)
 - **1+3 PbP** (Linear Tracking Mouse Roaming)
 - **3+1 PbP** (Linear Tracking Mouse Roaming)
- 1+3 & 3+1 PbP Modes with 21:9 Monitor Empowers Four 16:9 Views (Undistorted / Uncut)
- **Flexible Control Methods :**
 - Hotkey Control -Serial Control -Mouse Roaming
 - Mouse Control -Push Buttons -Keypad IN
- **Keypad IN** Allows Remote Control by 3rd-Party Keypad

Multi-View Layouts

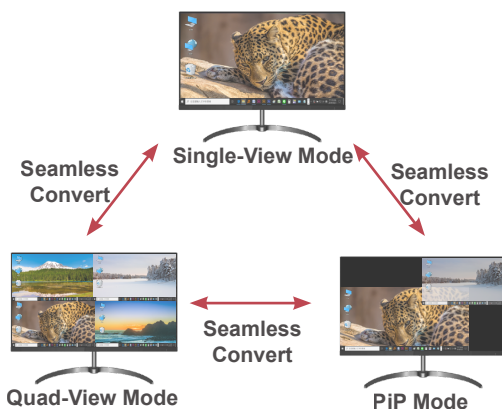

Specification

Model Number		QSKM-3114 & QSKP-3114	
MAX. Resolution (4K@60Hz, 4:4:4)	16:9	3840x2160, 2560x1440, 1920x1080	
	21:9	3840x1600, 3440x1440, 2560x1080	
	32:9	3840x1080	
Interfaces		PC Side	Console Side
Video Switching	QSKM-3114	HDMI 2.0 x 4 (In)	HDMI 2.0 x 1 (Out)
	QSKP-3114	4K DP x 4 (In)	HDMI 2.0 x 1 (Out) 4K DP x 1 (Out)
USB 3.2 Switching (5Gbps)		USB 3.2-B x 4	USB 3.2-A x 1 USB HID-A x 3
Audio Switching		SPK x 4 (In)	SPK x 1 (Out)
Control Methods		Hotkey Control, Serial Control Mouse Roaming, Keypad IN Mouse Control (Side Button)	
Video Modes		Quad-View, PiP Mode, Full-Screen 1+3 PbP, 3+1 PbP	
Seamless Switching		Zero Latency	
Serial Control		RJ-11 x 1 (19200bps) (8-Selections, 9600~115200bps) USB-C x 1	
Push Buttons		Port-Select x 4, Function x 4	
Hot Plug-and-Play		Yes	